



O-RINGS



CROSS SECTION 1.78 MM

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.



ID	REF.	OR	GB
1.78	2007	-	004
2.57	2010	-	005
2.90	2012	101	006
3.35	SP1	-	-
3.68	2015	102	007
3.90	-	-	-
3.95 c	-	-	-
4.47	2018	103	008
4.76	-	-	802
5.28	2021	104	009
6.07	2025	105	010
6.35	-	-	-
6.75	-	106	610
7.20	-	-	-
7.65	2031	107	011
7.94	-	-	804
8.73	-	108	611
9.25	2037	110	012
9.52	-	-	-
9.75	-	-	-
10.35	-	-	-
10.82	2043	-	013
11.11	-	114	806
12.42	2050	-	014
14.00	2056	-	015
14.50	-	-	-
14.65	-	-	-
15.08	-	-	-
15.20	-	-	-
15.60	2062	-	016
17.17	2068	-	017
17.93c	-	-	-
18.77	2075	-	018
19.50	-	-	-
20.35	2081	-	019
22.00	2087	-	020
23.52	2093	-	021

ID	REF.	OR	GB
25.12	2100	-	022
26.70	2106	-	023
27.00	-	-	-
27.50	-	-	-
28.30	2112	-	024
29.00	-	-	-
29.87	2118	-	025
31.47	2125	-	026
33.05	2131	-	027
34.65	2137	-	028
37.82	2150	-	029
39.45	-	-	519
41.00	2162	-	030
44.17	2175	-	031
46.30	-	-	-
47.35	2187	-	032
49.65	-	-	-
50.52	2200	-	033
53.70	2212	-	034
55.25	-	-	-
56.87	2225	-	035
60.05	2237	-	036
62.00	-	-	-
63.22	2250	-	037
66.40	2262	-	038
69.57	2275	-	039
72.75	2287	-	040
75.92	2300	-	041
79.00	-	-	532
82.27	2325	-	042
85.00	-	-	-
88.62	2350	-	043
91.70	-	-	536
101.32	2400	-	045
104.40	-	-	540
107.67	2425	-	046
112.50	-	-	-

ID	REF.	OR	GB
114.02	2450	-	047
120.37	2475	-	048
126.72	2500	-	049
133.07	2525	-	050
170.69	-	-	-

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.


O-RINGS



CROSS SECTION 2.62 MM

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.

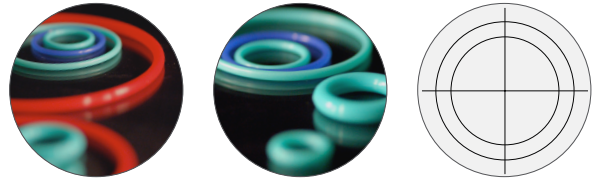

ID	REF.	OR	GB
3.63	-	-	-
7.59	-	-	109
9.19	3037	111	110
9.92	-	112	613
10.77	3043	113	111
11.70	-	-	-
11.91	-	115	614
12.37	3050	116	112
13.10	-	117	615
13.94	3056	118	113
15.08	-	119	616
15.54	3062	120	114
15.88	-	121	809
17.12	3068	122	115
17.86	-	123	617
18.72	3075	124	116
20.29	3081	-	117
20.63	-	128	812
21.89	3087	-	118
22.20	-	130	813
23.47	3093	-	119
23.81	-	132	814
25.07	3100	-	120
26.07	-	-	-
26.64	3106	-	121
28.24	3112	-	122
29.82	3118	-	123
31.42	3125	-	124
32.99	3131	-	125
34.59	3137	-	126
35.20	-	-	-
36.17	3143	-	127
37.21	-	-	-
37.77	3150	-	128
39.34	3156	-	129
40.94	3162	-	130
42.52	3168	-	131

ID	REF.	OR	GB
44.12	3175	-	132
45.69	3181	-	133
47.29	3187	-	134
48.90	3193	-	135
50.47	3200	-	136
52.07	3206	-	137
53.64	3212	-	138
55.25	3218	-	139
56.82	3225	-	140
58.42	3231	-	141
59.99	3237	-	142
61.60	3243	-	143
63.17	3250	-	144
64.77	3256	-	145
66.34	3262	-	146
67.95	3268	-	147
69.52	3275	-	148
71.12	3281	-	149
72.69	3287	-	150
75.87	3300	-	151
77.50	-	-	641
79.05	-	-	-
82.22	3325	-	152
88.57	3350	-	153
92.71	-	-	-
94.92	3375	-	154
101.27	3400	-	155
107.62	3425	-	156
113.97	3450	-	157
120.62	3475	-	158
124.40	-	-	-
126.67	3500	-	159
133.02	3525	-	160
137.00	-	-	-
139.37	3550	-	161
145.72	3575	-	162
152.07	3600	-	163

ID	REF.	OR	GB
158.42	3625	-	164
164.78	3650	-	165
171.12	3675	-	166
175.00	-	-	-
177.47	3700	-	167
183.33	-	-	168
190.17	3750	-	169
196.52	3775	-	170
202.87	3800	-	171
209.22	3825	-	172
215.57	3850	-	173
221.92	3875	-	174
228.27	3900	-	175
234.62	3925	-	176
240.97	3950	-	177
247.32	3975	-	178
259.26	-	-	-
264.50	-	-	-
298.00	-	-	-
312.00	-	-	-
317.50	-	-	-
440.69	-	-	-
450.00	-	-	-

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.



O-RINGS



CROSS SECTION 3.53 MM

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.



ID	REF.	OR	GB
4.35	-	-	-
9.12	-	-	-
10.69	4042	-	-
12.29	4050	-	-
13.87	-	-	-
15.47	4051	-	-
17.04	-	-	-
18.64	4075	125	-
20.22	4081	126	-
21.82	4087	129	-
23.39	4093	131	-
24.99	4100	133	-
26.57	4106	135	-
28.17	4112	136	-
29.74	4118	137	-
29.90	-	-	-
31.34	4125	138	-
32.93	4131	139	-
34.52	4137	140	-
36.09	4143	141	-
37.69	4150	142	-
38.90	-	-	-
39.49	-	-	-
39.69	-	144	-
40.87	4162	-	-
41.28	-	146	-
42.86	-	147	-
44.04	4175	-	-
44.45	-	149	-
46.04	-	150	-
47.22	4187	-	-
47.62	-	152	-
49.21	-	153	-
50.39	4200	-	-
50.80	-	155	-
51.94	-	-	-
52.39	-	156	-

ID	REF.	OR	GB
53.57	4212	-	-
55.56	-	159	-
56.74	4225	-	-
57.15	-	161	-
58.74	-	162	-
59.92	4237	-	-
61.92	-	165	-
63.09	4250	-	-
65.09	-	-	-
66.27	4262	-	-
66.68	-	170	-
69.44	4275	-	-
71.44	-	174	-
72.62	4287	-	-
74.61	-	177	-
75.79	4300	-	-
78.97	4312	-	-
82.14	4325	-	-
85.32	4337	-	-
88.49	4350	-	-
91.67	4362	-	-
94.84	4375	-	-
98.02	4387	-	-
101.19	4400	-	-
104.40	4412	-	-
107.54	4425	-	-
110.72	4437	-	-
113.89	4450	-	-
117.07	4462	-	-
120.24	4475	-	-
123.42	4487	-	-
126.59	4500	-	-
129.77	4512	-	-
132.94	4525	-	-
136.12	4537	-	-
139.29	4550	-	-
142.47	4562	-	-

ID	REF.	OR	GB
145.64	4575	-	-
148.82	4587	-	-
151.99	4600	-	-
158.34	4625	-	-
164.70	4650	-	-
171.05	4675	-	-
177.39	4700	-	-
183.74	4725	-	-
186.50	-	-	-
190.09	4750	-	-
196.44	4775	-	-
202.79	4800	-	-
209.14	4825	-	-
215.49	4850	-	-
218.19	-	-	-
221.84	4875	-	-
228.19	4900	-	-
234.54	4925	-	-
240.89	4950	-	-
247.20	4975	-	-
247.26	4975	-	-
253.69	41000	-	-
266.29	41050	-	-
278.99	41100	-	-
285.87	-	-	-
291.70	41150	-	-
304.39	41200	-	-
315.80	-	-	-
329.80	41300	-	-
342.90	-	-	-
353.37	-	-	-
355.19	41400	-	-
380.59	41500	-	-
450.00	-	-	-

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.



O-RINGS



CROSS SECTION 5.33 MM

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.



ID	REF.	OR	GB
7.50	-	-	-
21.59	-	-	316
29.51	-	-	321
32.69	-	-	323
34.29	-	-	324
37.47	6150	143	325
40.64	6162	145	326
42.40	-	-	-
43.82	6175	148	327
47.00	6187	151	328
47.50	-	-	-
50.16	6200	154	329
53.34	6212	157	330
56.52	6225	160	331
59.69	6237	163	332
62.87	6250	166	333
66.04	6262	169	334
69.22	6275	172	335
72.39	6287	175	336
74.63	-	178	619
75.57	6300	179	337
78.74	6312	180	338
81.92	6325	182	339
85.09	6337	183	340
88.27	6350	184	341
91.44	6362	186	342
94.62	6375	187	343
97.79	6387	188	344
100.97	6400	190	345
104.14	6412	191	346
107.32	6425	192	347
110.49	6437	194	348
113.67	6450	195	349
116.84	-	-	350
117.48	-	-	860
120.02	-	201	351
123.19	-	-	352

ID	REF.	OR	GB
123.83	-	203	352A
126.37	-	-	353
129.54	-	-	354
132.72	-	-	355
135.89	-	-	356
136.50	-	213	356A
139.07	-	-	357
139.70	-	215	357A
142.24	-	-	358
145.42	-	-	359
146.06	-	219	359A
148.49	-	-	360
149.20	-	-	870
151.77	-	-	361
158.12	-	-	362
164.46	6645	-	363
167.70	-	-	363A
170.82	-	-	364
173.00	-	-	-
177.17	-	-	365
183.52	-	-	366
189.87	6745	-	367
193.50	-	-	-
196.22	6775	-	368
202.57	6795	-	369
205.00	-	-	-
208.92	6820	-	370
215.26	-	-	371
221.64	-	-	372
227.97	-	-	373
234.32	6920	-	374
240.67	-	-	375
247.02	-	-	376
253.37	6995	-	377
266.07	-	-	378
278.77	-	-	379
291.47	61150	-	380

ID	REF.	OR	GB
304.17	61200	-	381
329.57	-	-	382
354.97	-	-	383
357.97	61400	-	-
380.37	-	-	384
405.26	-	-	385
430.66	-	-	386
456.06	61800	-	387

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.



O-RINGS



CROSS SECTION 6.99 MM

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.



ID	REF.	OR	GB
101.60	-	-	-
113.67	8450	196	425
116.84	8462	198	426
120.02	8475	200	427
123.19	8487	202	428
123.83	-	-	-
126.37	8500	205	429
129.54	8512	207	430
132.72	8525	209	431
135.89	8537	212	432
139.10	8550	214	433
142.24	8562	216	434
145.42	8575	218	435
148.59	8587	220	436
151.80	8600	222	437
158.12	8625	224	438
159.50	-	-	625
164.47	8659	227	439
170.82	8675	230	440
177.17	8700	232	441
183.52	8725	234	442
189.87	8750	236	443
193.50	-	-	443A
196.22	8775	238	444
202.57	8800	240	445
205.00	-	-	-
208.92	8825	241	445A
227.97	8900	-	447
234.32	8925	245	447A
240.67	8950	246	448
247.00	8975	247	448A
253.97	81000	248	449
259.70	81025	249	449A
266.07	81050	250	450
266.70	-	-	-
272.40	81075	251	450A
278.77	81100	252	451



ID	REF.	OR	GB
285.10	-	-	686
291.47	81150	254	452
297.80	81175	255	452A
304.17	81200	256	453
316.87	81250	257	454
329.57	81300	258	455
342.27	81350	259	456
354.90	81400	260	457
367.67	81450	261	458
380.37	81500	262	459
393.10	81550	263	460
405.26	81600	-	461
443.36	-	-	464
468.76	-	-	466

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.

FRENCH METRICS

GENERAL SPECIFICATIONS:

Rings O.R. type available in all international size. Standard A.S. 568A/ BS1806, DIN 3771/ ISO 3601, SMS 1586/ BS 4518, JAPANESE NORM JIS B 2401, metric.



ID	THICKNESS	FR
2.60	1.90	R1
3.40	.	R2
3.70	.	-
4.20	.	R3
4.90	.	R4
5.70	.	R5
6.20	.	-
6.40	.	R5A
6.80	.	-
7.20	.	R6
7.80	.	-
8.00	.	R6A
8.90	.	R7
9.50	.	-
9.92	.	-
13.40	.	-
28.00	.	-
8.90	2.70	R8
10.00	.	-
10.50	.	R9
12.10	.	R10
13.60	.	R11
14.00	.	-
15.10	.	R12
16.90	.	R13
18.40	.	R14
30.00	.	-
176.00	.	-
216.65	.	-
13.94	3.60	-
18.30	.	R15
21.30	.	R17
23.00	.	R18
24.60	.	R19
26.20	.	R20
27.80	.	R21
29.30	.	R22

ID	THICKNESS	FR
30.80	.	R23
32.50	.	R24
34.10	.	R25
35.60	.	R26
37.20	.	-
37.30	.	R27
88.10	.	-
115.00	.	-
198.00	.	-
202.00	.	-
37.47	5.33	R28
40.64	.	R29
43.82	.	R30
46.99	.	R31
50.16	.	R32
53.34	.	R33
56.52	.	R34
59.69	.	R35
62.87	.	R36
66.04	.	R37
69.22	.	R38
72.39	.	R39
75.57	.	R40
78.74	.	R41
81.92	.	R42
85.09	.	R43
88.27	.	R44
91.44	.	R45
94.62	.	R46
97.79	.	R47
100.97	.	R48
104.14	.	R49
107.32	.	R50
110.49	.	R51
113.67	.	R52
113.67	6.99	R53
116.84	.	R54

ID	THICKNESS	FR
120.02	.	R55
123.19	.	R56
126.37	.	R57
129.54	.	R58
132.72	.	R59
135.89	.	R60
139.10	.	R61
142.24	.	R62
145.42	.	R63
148.59	.	R64
151.80	.	R65
158.12	.	R66
164.47	.	R67
170.82	.	R68
177.17	.	R69
183.52	.	R70
189.57	.	R71
196.22	.	R72

Values and coefficients contained in this sheet are for information only and shall in no event be held to constitute or imply any warranty, undertaking, express or implied commitment. No liability whatsoever can be accepted by ITG SRL with respect to difference to the values reported in the tables or misuse by the Customer of the product.